


## SOUND DOORLITE SYSTEMS: Let the Light In

Our attractive Slimport circular frames containing a special SOUND SHEET sound barrier can be used to install lites in sound-rated doors. Manufactured in the U.K. by Zero Seal Systems, Ltd., these frames are suitable for installation in partitions and doors. They feature a unique, flush-fitting design with countersunk holes and mounting screws around the bevel on one side only for a clean appearance.


For use with 1 3/4" (44mm) door and 1/4" (6.4mm) glass. Frames are available in four finishes. Glass not included.

Number	Cut-Out Diameter	Glass Diameter	Frame Diameter
<b>SP250</b>	9.84"(250mm)	8.78"(223mm)	11.22"(285mm)
<b>SP350</b>	13.77"(350mm)	12.72"(323mm)	15.15"(385mm)
<b>SP450</b>	17.71"(450mm)	16.65"(423mm)	19.09"(485mm)
<b>SP550</b>	21.65"(550mm)	20.59"(523mm)	23.03"(585mm)



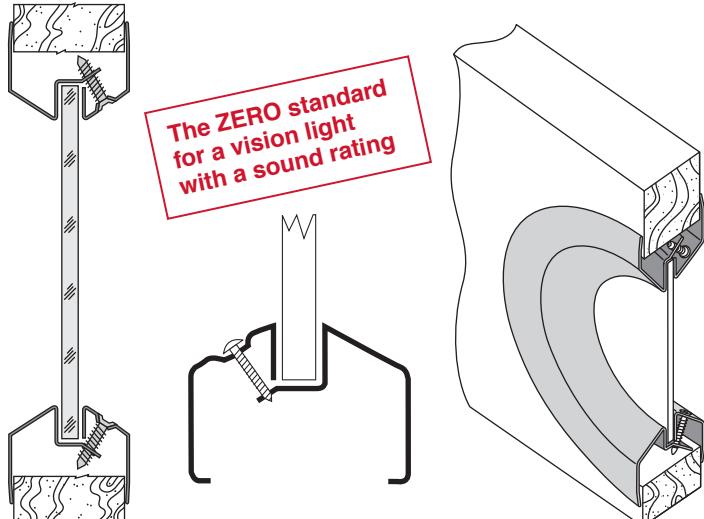


### Material & Finish (add suffix to number code)


- **GV: 18GA** cold rolled steel, zinc plated finish (for color coating)
- **CP: 18GA** cold rolled steel, chrome pearlite silver plated (to match Satin Anodized Aluminum)
- **SS: Grade 304** stainless steel, satin finish
- **PC: 18 GA** cold rolled steel, polished chrome plated

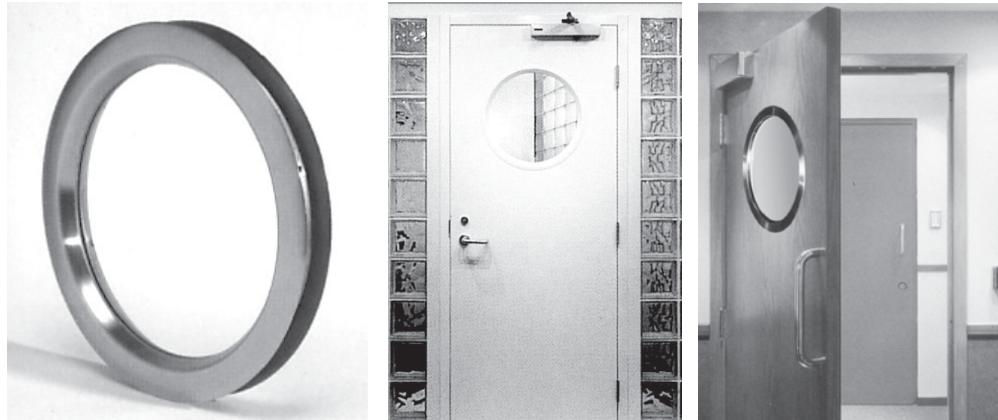

## #8880 - Vision Lite for Doors, Walls and Acoustical Windows

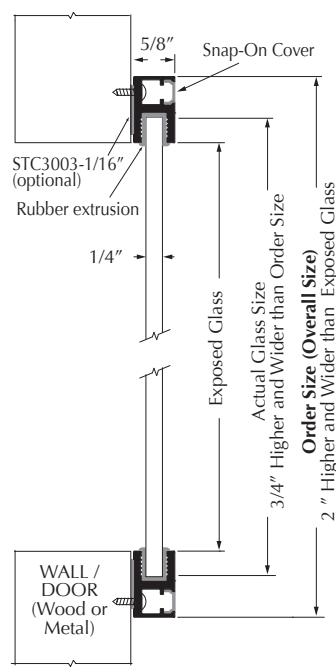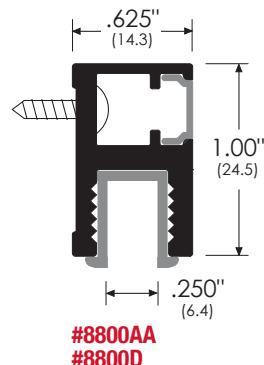

● APPLICATION ON DOOR  
Surface mounted.

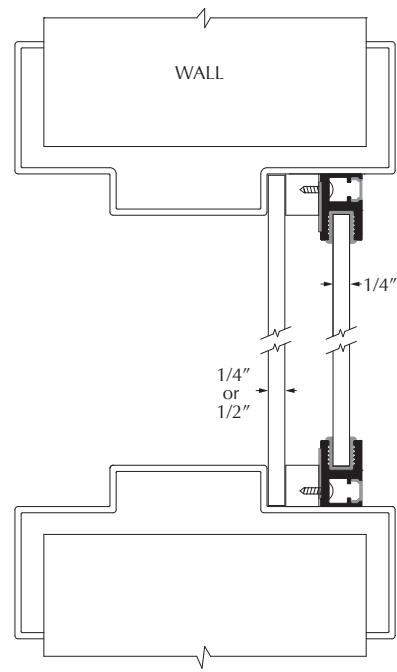

● APPLICATION ON WINDOW  
Surface mounted on any edge of window frames.

**V**ision Lite for any thickness of doors, walls and acoustical windows to increase sound rating. Used with 1/4" thick glass (Glass sold separately). Aluminum extrusion frame with concealed screws. Available in clear anodized or dark anodized finish.